

## 26" High-Definition LCD Open Frame Display

### Specifications

LCD PANEL	
Brightness	500 cd/m <sup>2</sup>
Contrast Ratio	800:1
Viewing Angle	H:160° / V:150°
Response Time	8ms (Tr+Tf)
Supported colors	16.2M colors
Resolution	1366 x 768 (16:9)

DISPLAY FEATURES	
Horizontal Frequency	30 ~ 65 KHz
Vertical Frequency	56 ~ 75 Hz
Input Resolution	1366 x 768 @ 60Hz (Analog) 1366 x 768 @ 60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English, Japanese, Chinese

PHYSICAL FEATURES	
Connector	15 pin D-Sub / DVI / Component / S-video / AV
Dimensions	626 x 400.7 x 93.5 mm (WxHxD)
Weight	7.5 kg
Wall / Arm Mount Type	200mm x 200mm VESA

SPECIAL FEATURES	
Multimedia	PIP, PAP, Zoom
Fanless Design	Yes
Source Auto Detect	Yes
Communication Port (Transport Protocol)	D-Sub 9 Pin, RJ45 In/Out (RS-232, RS-485 In/Out)


POWER CONSUMPTION	
Power Supply	AC 100V ~ 240V (50 / 60 Hz)
Normal Operation	165W
Suspend / Standby	15W
Power Off Mode	15W

### ST-HB26B1F

ENVIRONMENTAL	
Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH



### Dimensions

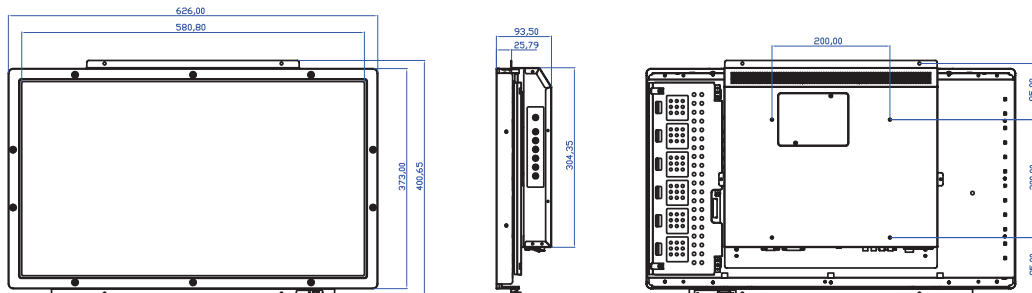

\*All specifications subject to change without notice.