

32" High-Definition LCD Open Frame Display

Specifications

LCD PANEL

Brightness	500 cd/m ²
Contrast Ratio	1500:1
Viewing Angle	H:176° / V:176°
Response Time	6.5ms (GTG)
Supported colors	16.7M colors
Resolution	1366 x 768

DISPLAY FEATURES

Horizontal Frequency	30 ~ 65 KHz
Vertical Frequency	56 ~ 75 Hz
Input Resolution	1366 x 768 @ 60Hz (Analog) 1366 x 768 @ 60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English, Chinese, Japanese

PHYSICAL FEATURES

Connector	15 pin D-Sub / DVI / Component / S-video / AV
Dimensions	782 x 486.4 x 92.8 mm (WxHxD)
Weight	11.6 kg
Wall / Arm Mount Type	200mm x 200mm VESA


SPECIAL FEATURES

Multimedia	PIP, PAP, Zoom
Fanless Design	Yes
Source Auto Detect	Yes
Communication Port (Transport Protocol)	D-Sub 9 Pin, RJ45 In/Out (RS-232, RS-485 In/Out)



POWER CONSUMPTION

Power Supply	AC 100V ~ 240V (50 / 60 Hz)
Normal Operation	165W
Suspend / Standby	15W
Power Off Mode	15W

ST-HB32B1F

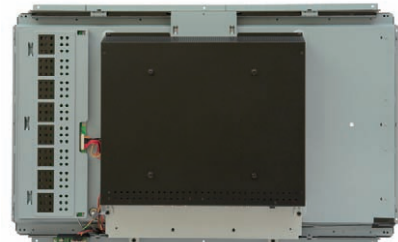

Dimensions

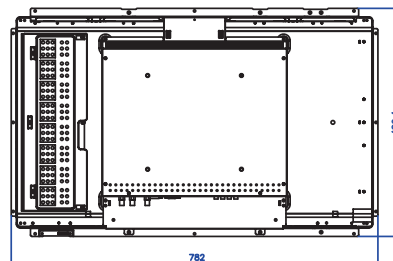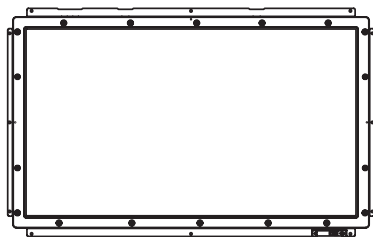

*All specifications subject to change without notice.