

37" High-Definition LCD Display

Specifications

LCD PANEL

Brightness	500 cd/m ²
Contrast Ratio	1200:1
Viewing Angle	H:176° / V:176°
Response Time	6.5ms (GTG)
Supported Colors	16.7M colors
Resolution	1920 x 1080 (16:9)

DISPLAY FEATURES

Horizontal Frequency	30K ~ 65KHz
Vertical Frequency	56 ~ 75Hz
Input Resolution	1920 x 1080 @ 60Hz (Analog) 1920 x 1080 @ 60Hz (Digital)
DDC	DDC 2B
OSD Control	RS232C, Push button, IR Remote Controller
OSD Language	English

PHYSICAL FEATURES

Connector	15 pin D-Sub / DVI / Component / S-video / AV
Dimensions w/o Stand	914 x 555 x 113 mm (WxHxD)
Diagonal	37"
Weight w/o Stand	Net: 28kg Gross: 33kg
Wall / Arm Mount Type	200mm x 200mm VESA

SPECIAL FEATURES

Multimedia	PIP, PAP, Zoom
Fanless Design	Yes
Source Auto Detect	Yes
Communication Port (Transport Protocol)	D-Sub 9 Pin In, RJ45 In/Out (RS232C In, RS-485 In/Out)

POWER CONSUMPTION

Power Supplier	AC 100V ~ 240V (50 / 60 Hz)
Normal Operation	less than 210W
Suspend / Standby	less than 38W
Power Off Mode	less than 38W

ST-HB37A1X

ENVIRONMENTAL




Operating Temperature	5°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	85%RH
Storage Humidity	85%RH

OPTIONS

Protective Surface	4mm Tempered Glass (AG/AR)
Audio Amplifier	In *1 or *2, Out *1
Speaker	10W x 2EA, 4Ω / 10W+10W(rms)@THD<1%



Dimensions

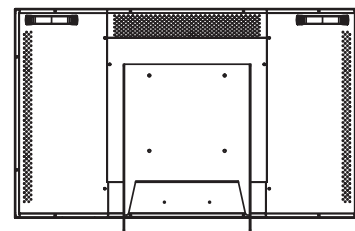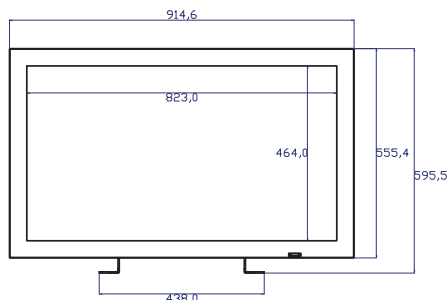

*All specifications subject to change without notice.