



MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
COMPANY NAME	STANDARD		00	01-FEB-02	DATE			
APPROVED BY		SHEET 1 OF 2			DRAWN BY : SH.Q.YANG	UNIT IN mm	OUR REF. 00	
DATE		SCALE 3 : 1						

PROJECTION

S5005

CLOVER DISPLAY LIMITED

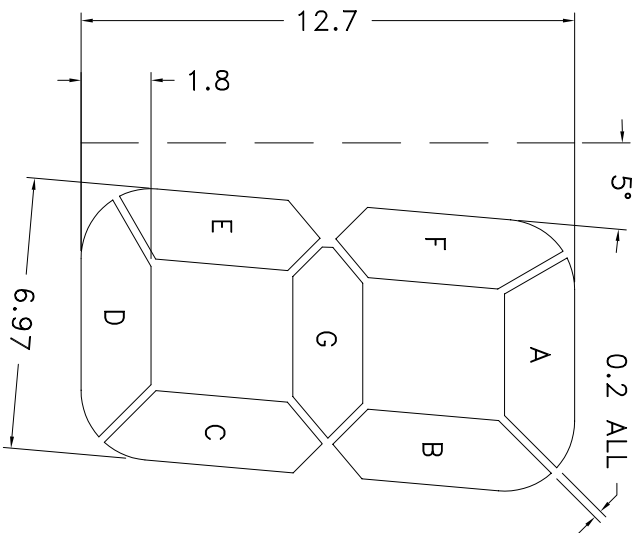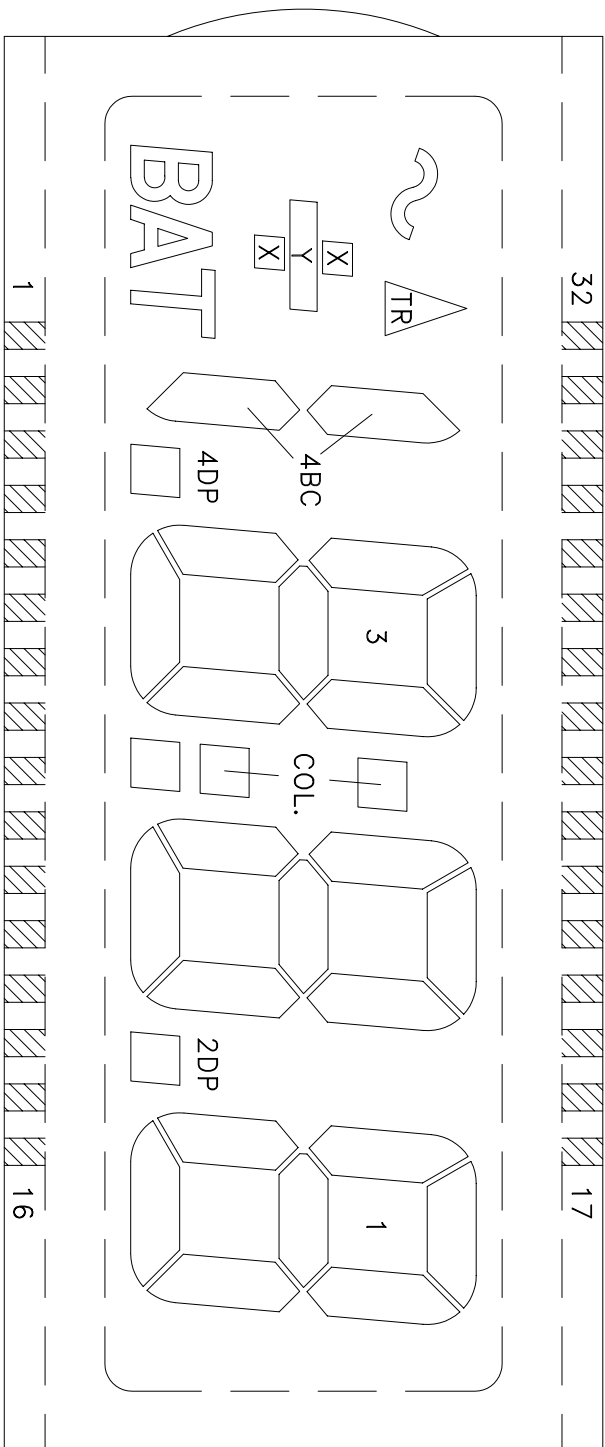

SCALE 5 : 1

PIN	COM	PIN	COM
1	COM	17	1A
2	Y	18	1F
3	4BC	19	1G
4	4DP	20	2B
5	3E	21	2A
6	3D	22	2F
7	3C	23	2G
8	3DP	24	COL.
9	2E	25	3B
10	2D	26	3A
11	2C	27	3F
12	2DP	28	3G
13	1E	29	~
14	1D	30	TR
15	1C	31	X
16	1B	32	BAT

TN TYPE

MODEL NO.	S5005A	S5005B	S5005E	S5005F
VIEWING DIRECTION	6 0'CLOCK	6 0'CLOCK	12 0'CLOCK	12 0'CLOCK
TEMPERATURE RANGE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C
DISPLAY TYPE	REFLECTIVE / POSITIVE			

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATICS

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	01-FEB-02	CUSTOMER REF.	APPROVED BY			
				DATE			
				DRAWN BY : SH.Q.YANG		UNIT IN mm	OUR REF. 00

PROJECTION

S5005

SCALE 7 : 2

SHEET 2 OF 2

CLOVER DISPLAY LIMITED