


MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE	PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
COMPANY NAME	STANDARD		00	01-DEC-03		APPROVED BY			
APPROVED BY					SHEET 1 OF 2	DATE			
DATE					SCALE N.T.S	DRAWN BY : ZH.Q.LI		UNIT IN mm	OUR REF. 00
					S5044				
					CLOVER DISPLAY LIMITED				

PIN	COM	PIN	COM
1	COM	26	5A
2	/	27	5F
3	/	28	5G
4	/	29	4B
5	/	30	4A
6	1E	31	4F
7	1D	32	4G
8	1C	33	4G
9	DP1	34	COL.
10	2E	35	3B
11	2D	36	3A
12	2C	37	3F
13	DP2	38	3G
14	3E	39	2B
15	3D	40	2A
16	3C	41	2F
17	DP3	42	2G
18	4E	43	/
19	4D	44	1B
20	4C	45	1A
21	DP4	46	1F
22	5E	47	1G
23	5D	48	/
24	5C	49	/
25	5B	50	/

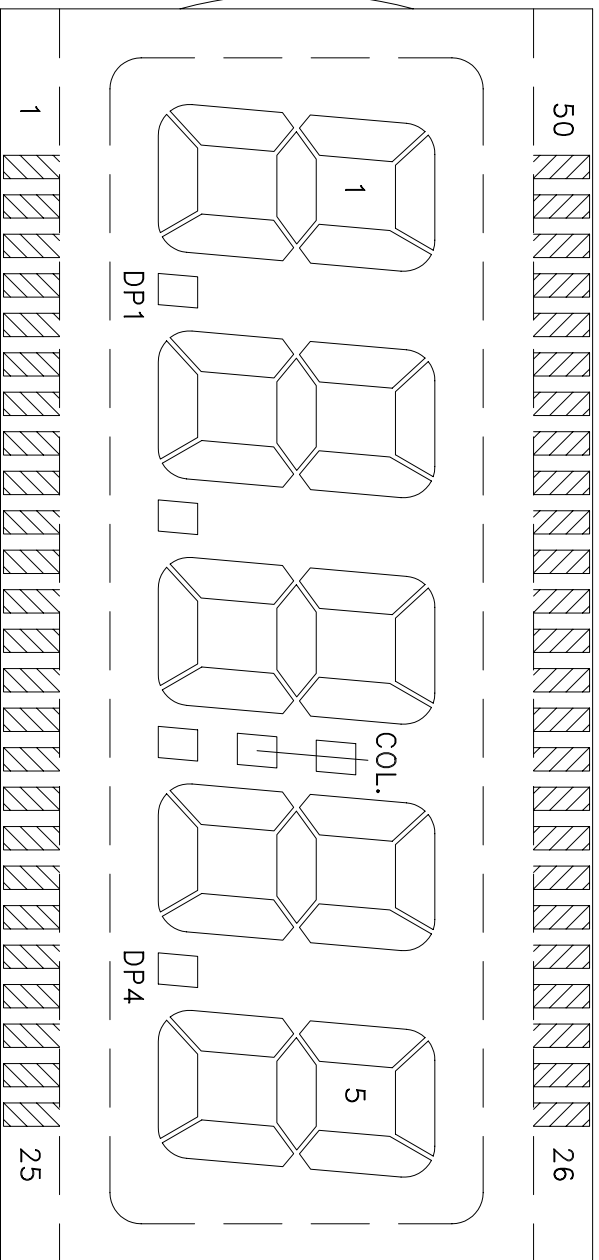

SCALE 5 : 2

TN TYPE

MODEL NO.	S5044A	S5044B	S5044C	S5044D	S5044E	S5044F	S5044G	S5044H
VIEWING DIRECTION	6 0'CLOCK	6 0'CLOCK	6 0'CLOCK	12 0'CLOCK	12 0'CLOCK	12 0'CLOCK	12 0'CLOCK	12 0'CLOCK
TEMPERATURE RANGE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C
STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE
OPERATION VOLTAGE	REFLECTIVE / TRANSPARENT / TRANSMISSIVE
DRIVING METHOD	3.0 V STATIC

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	01-DEC-03	CUSTOMER REF.	APPROVED BY			
			SHEET 2 OF 2	DATE			
			SCALE 2 : 1	DRAWN BY : ZH.Q.LI	UNIT IN mm	OUR REF. 00	
S5044				 CLOVER DISPLAY LIMITED			