


VIEWING DIRECTION

- CHARACTERISTICS :
- 1) OPERATING VOLTAGE : 3.0V
 - 2) OPERATING TEMPERATURE : 0°C TO 50°C
 - 3) STORAGE TEMPERATURE : -10°C TO 60°C
 - 4) DRIVING METHOD : STATIC
 - 5) VIEWING DIRECTION : 6 O'CLOCK
 - 6) DISPLAY TYPE : REFLECTIVE (POSITIVE)

TOL. ±0.2 UNLESS SPECIFIED

PIN	1	2	3	4	5	6	7	8	9	10
COM	COM				1E	1D	1C	P1	2E	2D
PIN	11	12	13	14	15	16	17	18	19	20
COM	2C	P2	3E	3D	3C	P3	4E	4C	4B	4A
PIN	21	22	23	24	25	26	27	28	29	30
COM	4A	4F	4G	3B	3A	3F	3G	COL	2B	2A
PIN	31	32	33	34	35	36	37	38	39	40
COM	2F	2G		1B	1A	1F	1G	X		COM

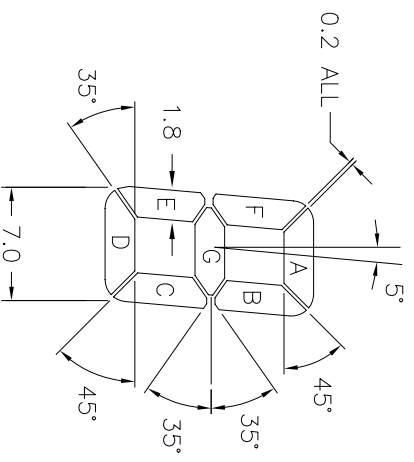

APPROVAL	COUNTER DRAWING	OUR REFERENCE (L)
APPROVED BY		S5126-KB-NCR-P
POSITION		CUSTOMER REFERENCE
COMPANY NAME	STANDARD	
DATE		SCALE 3 : 1
APPROVAL	DRAFTING	CUSTOMER-SERVICE
APPROVED BY		ENGINEERING
DATE		
PROJECTION	DRAWN BY <i>J. J. Wong</i>	UNIT IN mm
		SHEET 1 OF 1
S5126	DATE 20-9-91	CLOVER DISPLAY LIMITED