





<b>MODEL NO.</b>		S5956A
VIEWING DIRECTION	6 O'CLOCK	
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C
CONNECTOR	Zebra	
OPERATION VOLTAGE	3.0 V	
DRIVING METHOD	1/3 DUTY, 1/2 BIAS	
DISPLAY TYPE	TN / REFLECTIVE / POSITIVE	

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
COM1	COM1	/	/	1B	1A	1F	2B	2A	2F	3B	3A	3F	4B	4A	4F	5B	5A
COM2	/	COM2	/	1C	1G	1E	2C	2G	2E	3C	3G	3E	4C	4G	4E	5C	5G
COM3	/	/	COM3	/	1D	/	/	2D	/	/	3D	/	/	4D	/	/	5D
PIN	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	
COM1	5F	6B	6A	6F	7B	7A	7F	8B	8A	8F	9B	9A	9F	10B	10A	10F	
COM2	5E	6C	6G	6E	7C	7G	7E	8C	8G	8E	9C	9G	9E	10C	10G	10E	
COM3	/	/	6D	/	/	7D	/	/	8D	/	/	9D	/	/	10D	/	

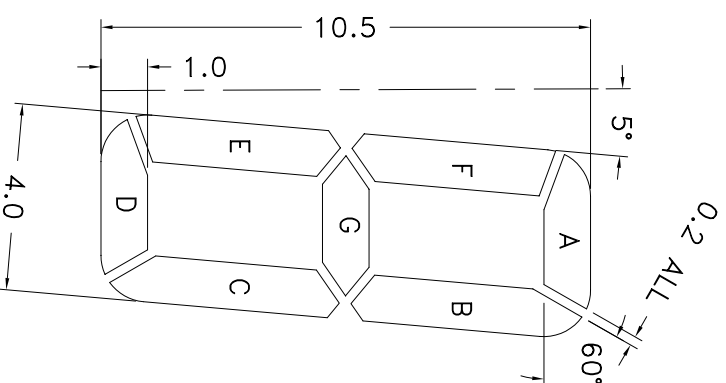

SCALE 6 : 1

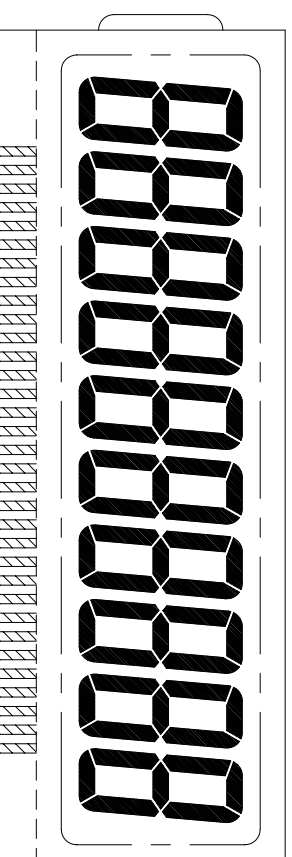

REV.	REVISION RECORD		DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE		08-MAY-93	CUSTOMER REF.	APPROVED BY			
				SHEET 2 OF 2	DATE			
				SCALE NTS	DRAWN BY : L.Y.HU		UNIT IN mm	OUR REF. 00
					<b>CLOVER DISPLAY LIMITED</b>			