

MECHANICAL TOL. ±0.2 UNLESS SPECIFIED


APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD	S5958-KB-NCR-P-Z	00	16-JUL-02
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 4 : 1		

PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
S5958	DATE	APPROVED BY		
	DRAWN BY : ZH.Q.LI		UNIT IN mm	OUR REF. 00
	CLOVER DISPLAY LIMITED			

TN TYPE


MODEL NO.		S59958A	S59958B	S59958E	S59958F
VIEWING DIRECTION	6 0°CLOCK	6 0°CLOCK	12 0°CLOCK	12 0°CLOCK	
TEMPERATURE RANGE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	
	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	
DISPLAY TYPE	REFLECTIVE / POSITIVE				

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	1/3 DUTY , 1/2 BIAS

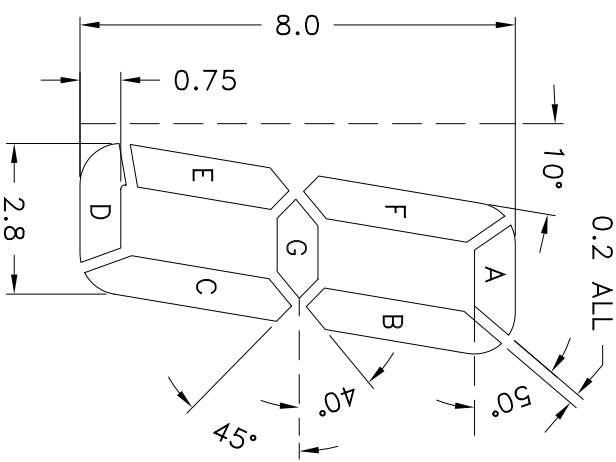


SCALE 7 : 1

PIN	COM1	COM2	COM3	PIN	COM1	COM2	COM3
1	COM1	/	/	18	6F	6E	/
2	/	COM2	/	19	5B	5C	/
3	/	/	COM3	20	5A	5G	5D
4	10B	10C	/	21	5F	5E	/
5	10A	10G	10D	22	4B	4C	/
6	10F	10E	/	23	4A	4G	4D
7	9B	9C	/	24	4F	4E	/
8	9A	9G	9D	25	3B	3C	/
9	9F	9E	/	26	3A	3G	3D
10	8B	8C	/	27	3F	3E	/
11	8A	8G	8D	28	2B	2C	/
12	8F	8E	/	29	2A	2G	2D
13	7B	7C	/	30	2F	2E	/
14	7A	7G	7D	31	1B	1C	/
15	7F	7E	/	32	1A	1G	1D
16	6B	6C	/	33	1F	1E	/
17	6A	6G	6D				

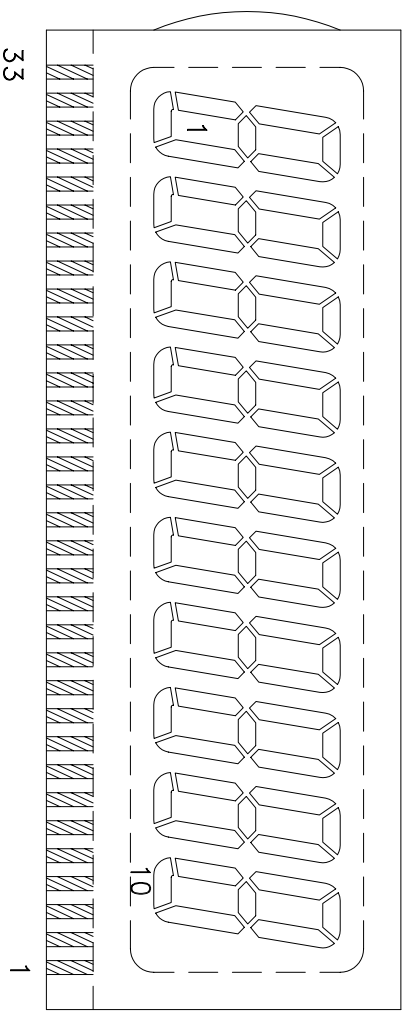

33

REV.	REVISION RECORD		DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE		16-JUL-02	CUSTOMER REF. S5958-KB-NCR-P-Z	APPROVED BY			
				SHEET 2 OF 2	DATE		UNIT IN mm	OUR REF. 00
				SCALE N.T.S	DRAWN BY : ZH.Q.LI			
					<b>CLOVER DISPLAY LIMITED</b>			



PROJECTION  
S5958