
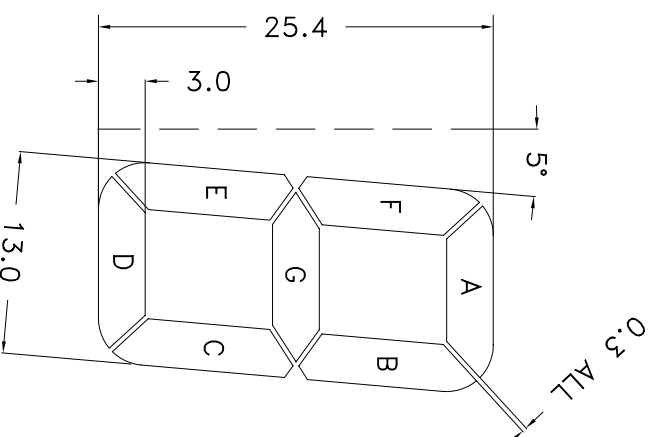


MECHANICAL TOL. ± 0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD	00	00	07-FEB-96
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 3 : 2		

<p>PROJECTION</p>	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	DATE	APPROVED BY		
<p>S5973A</p> <p>CLOVER DISPLAY LIMITED</p>	DRAWN BY : KURT WAT	UNIT IN mm	OUR REF. CL.	

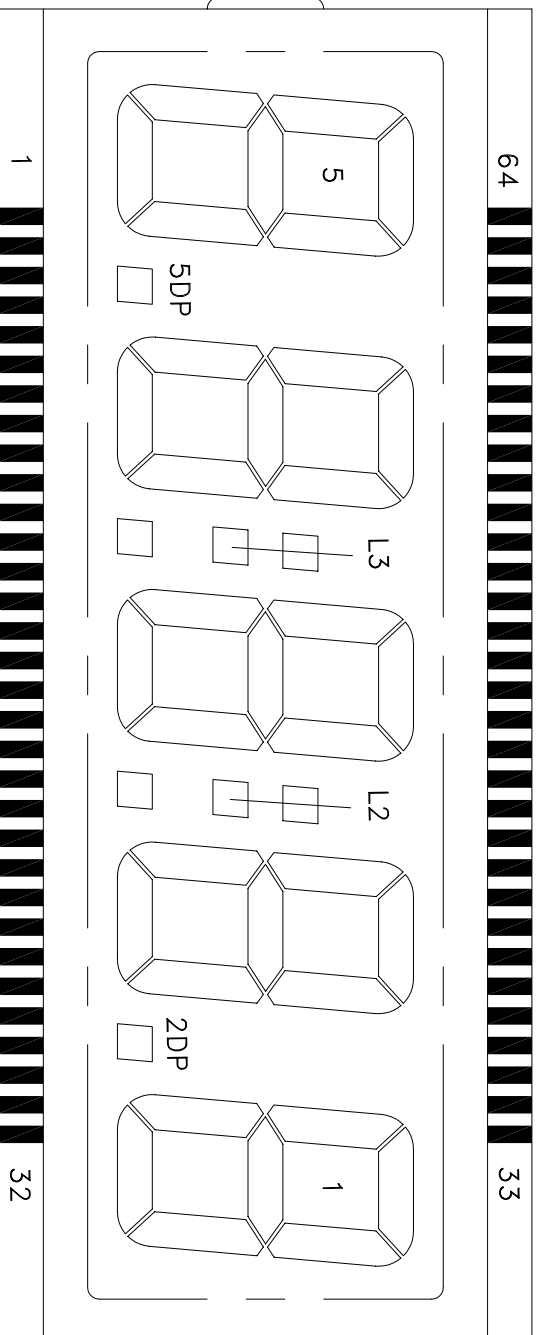

SCALE 2 : 1

PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	17	/	33	1A	49	/
2	5E	18	3D	34	1F	50	3F
3	5D	19	3C	35	1G	51	3G
4	5C	20	3DP	36	/	52	L3
5	5DP	21	/	37	/	53	/
6	4E	22	/	38	2B	54	4B
7	/	23	2E	39	2A	55	4A
8	/	24	/	40	/	56	/
9	4D	25	2D	41	/	57	/
10	4C	26	2C	42	2F	58	4F
11	/	27	/	43	2G	59	4G
12	4DP	28	2DP	44	L2	60	5B
13	/	29	1E	45	3B	61	5A
14	3E	30	1D	46	3A	62	5F
15	/	31	1C	47	/	63	5G
16	/	32	1B	48	/	64	COM

- CHARACTERISTICS :
- 1) OPERATING VOLTAGE : 3.0 V
 - 2) OPERATING TEMPERATURE : 0°C TO 50°C
 - 3) STORAGE TEMPERATURE : -10°C TO 60°C
 - 4) DRIVING METHOD : STATIC
 - 5) DISPLAY TYPE : TN / REFLECTIVE / POSITIVE
 - 6) VIEWING DIRECTION : 6 O'CLOCK

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	07-FEB-96	CUSTOMER REF. 00	APPROVED BY			
			SHEET 2 OF 2	DATE			
			SCALE 3 : 2	DRAWN BY : KURT WAT		UNIT IN mm	OUR REF. CL.
				CLOVER DISPLAY LIMITED			



S5973A