


MSC CXB-CD945

Intel® Core™ Duo



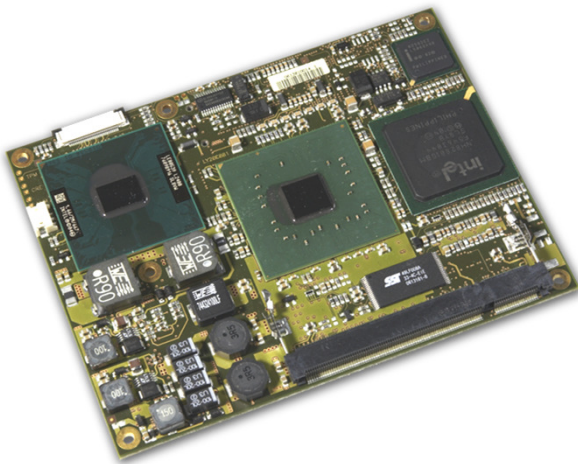


Description

The design of the MSC CXB-CD945 module is based on Intel's dual core CPU technology.

This mature entry level COM Express Basic form factor board has already been successfully integrated in a whole range of designs and can be called an industry reference product.

Dual core CPU technology and MSC's optionally embedded security BIOS functions enable secure, tamper and cloning proof applications.

For applications with low power requirements we supply a low voltage version with a single core CPU.

95x125 
20/40 W 
Mid / High 

Highlights

- Intel® Core™ Duo (1.2Ghz – 1.66GHz)
- Intel® Celeron M (1.06GHz, 1.86GHz)
- Mobile Intel® 945GME Chipset with integrated Intel® GMA 950
- Up to 2GB DDR2 SDRAM
- Two SATA-300, one PATA mass storage interfaces
- LVDS interface up to 2048 x 1536
- CRT interface up to 2048 x 1536
- Dual Independent Display supported
- Four PCI Express™ x1 lanes
- Eight USB 2.0 interfaces
- Infineon TPM 1.2

Technical Data – MSC CXB-CD945

Core Logic, Memory

COM Express: Intel® Celeron M 423 (1,06GHz), Intel® Celeron M 440 (1.86 GHz), Intel® Core™ Duo L2400 (1.66 GHz) or Intel® Core™ 2 Duo L7400 (1.5 GHz), Intel® Core™ Duo U2500 (1.2 GHz)

Chipset: Intel® 82945GM(E), ICH7-M

Memory: 200-pin SO-DIMM socket for up to 1GB PC4200 DDR2 SDRAM

Drives

SATA: 2 x SATA-2 channels (up to 300MB/s)

EIDE: 1 x Enhanced IDE port (ATA/UDMA100)

Standard Interfaces

USB: 8 x USB 2.0

Bus Interfaces

COM Express™ Interface: Type 2 interface, fully compliant

PCI Express™ Interface:s: Four channels PCI Express x1, one channel used for Gbit Ethernet , one PCI Express Graphic (PEG) x 16

PCI Bus: 32 Bit, 33MHz standard interface (PCI 2.3)

LPC: Low Pin Count bus for heritage interfaces

Flat Panel / CRT Interface

Graphics Controller: Intel® Graphics Media Accelerator 950 (integrated in Intel® 945GM/E chipset)

Video Memory: UMA, up to 224 MB

LCD Interface: LVDS 24/48 Bit, dual channel, Resolution up to 1600 x 1200

CRT Interface: Resolution up to 2048 x 1536

Miscellaneous

Watchdog Timer: Initiates system reset (programmable, 1s ... 255h)

Fan Supply: 3-pin header (5V)

Battery: External

System Monitoring: Voltage, Temperature, Fan

LAN Interface

Ethernet: 10/100/1000Base-TX (Intel® 82573E)

Sound Interface

Audio: AC'97 2.3 Audio Interface or HD Audio Interface (recommended)

Security Device

Infineon Trusted Platform Module 1.2 SLB 9635

Firmware, Software

Phoenix TrustedCore

Boot Options: Quick Boot, MultiBoot XP (FD, HD, CD, LAN, USB), Boot without keyboard, LAN Boot via PXE (RPL optional), Wake on LAN (WOL) supported

Security: Phoenix StrongROM technology, TPM 1.2 support, Pre-Boot-Authentication, Phoenix SecureFlash for safe BIOS updates

Power Management: ACPI (S3, S4, S5 supported), Enhanced Intel SpeedStep® technology supported, Active/passive cooling with CPU fan control

USB: USB legacy support (Keyboard, Mouse, Hub)

Video: VGA BIOS with flat panel extensions (EPI)

Setup: CMOS configuration backup in EEPROM

HW Programming I/F: UspEpc (Universal board support package for embedded PCs)

Power Supply

Power: Power +12V +/-10%, 5V Stby optional

Power Consumption: 9W typ. (423, 1,06GHz), 27W typ. (440, 1.86GHz), 20W typ. (L2400, 1.66GHz), 25W typ. (L7400, 1,5 GHz), 10W typ. (U2500, 1,2GHz),

Environment

Ambient: 0° ... 60°C (operating)

Temperature: -25°... 85°C (storage)

Humidity : 5 ... 95% (operating, non-condensing), 5 ... 95% (storage, non-condensing)

Mechanical

Dimensions: 125mm x 95mm x13mm

Order Reference – MSC CXB-CD945

Order Number	Description	Reference
32230	Intel® Core™ Duo L2400, 10/100/1000Base-TX, TPM 1.2	MSC CXB-CD945-L2400-162000
32237	Intel® Core™ 2Duo L7400, 10/100/1000Base-TX, TPM 1.2	MSC CXB-CD945-L7400-164000
32238	Intel® Core™ Duo U2500, 10/100/1000Base-TX, TPM 1.2	MSC CXB-CD945-U2500-262000

Accessories

Order Number	Description	Reference
	Cooling	
1073535	Active heatsink with spring mounted self aligning cooler elements Active Heatsink for CXB-CD945, CD9455, A945M with spring mounted selfaligning cooler elements connecting the component die. Aluminium plate with distance sleeves (2.7mm inner diameter), screws and thermopad for the southbridge. Speed controlled fan (YS type) with connector to the CPU module.	MSC CXB-945/915GM-01-HSF-003
1073536	Active heatsink with spring mounted self aligning cooler elements Active Heatsink for CXB-CD945, CD9455, A945M with spring mounted selfaligning cooler elements connecting the component die. Aluminium plate with distance sleeves (2.7mm inner diameter), screws and thermopad for the southbridge. Speed controlled fan (EF type) with connector to the CPU module.	MSC CXB-945/915GM-01-HSF-004
	Carrier Boards	
32367	COM Express Industrial Platform with PCI and PCI Express x1; Dual LAN, VGA/DVI, Quad USB, COM1/2, HD-Audio; MiniPCI, SATA, CF onboard, 170x170mm (mini-ITX)	MSC CX-MB-IP1 PCBFTX

Corporate Offices

MSC Vertriebs GmbH, Industriestraße 16, 76297 Stutensee, Tel. +49 7249 910 – 0, Fax +49 7249 7993 0
MSC Vertriebs GmbH, Design Center München-Neufahrn, Zeppelinstr. 1A, 85375 Neufahrn, Tel. +49 8165 906 – 100, E-mail: boards@msc-ge.com,
Technical Support COM: Tel. +49 8165 906 – 200, E-mail: support.boards@msc-ge.com, Internet: www.msc-ge.com/support-boards

Sales Offices Germany

München-Dornach · Tel. +49 89 945532 – 0 · **Berlin** · Tel. +49 30 720089-0 · **Hamburg** · Tel. +49 4106 7764-0 · **Hannover** · Tel. +49 511 616847-0 · **Braunschweig** · Tel. +49 5341 2999-0 · **Düsseldorf** · Tel. +49 211 92593-0 · **Aachen** · Tel. +49 2408 709 – 0 · **Koblenz** · Tel. +49 2630 96239-11 · **Rodgau** · Tel. +49 6106 26769 – 0 · **Wiesbaden** · Tel. +49 611 97320-0 · **Frankenthal** · Tel. +49 6233 344-0 · **Stuttgart** · Tel. +49 711 78336-0 · **Freiburg** · Tel. +49 761 8819 – 819 · **Nürnberg** · Tel. +49 911 43970-0 · **Jena** · Tel. +49 3641 6825-0 · **Stutensee** · Tel. +49 7249 910-173

Sales Offices Europe

MSC Vertriebs GmbH · Leobersdorf · Tel. +43 2236 205066-0 · **Velden** · Tel. +43 4274 23222-17 · **MSC Schweiz AG · Biel/Bienne** · Tel. +41 32 366 8565 · **Montreux** · Tel. +41 21 965 3500 · **Rotkreuz** · Tel. +41 41 785 8200 · **Volketswil** · Tel. +41 43 355 33 66 · **MSC Iberia S.L. · Barcelona** · Tel. +34 931 505 505 · **Madrid** · Tel. +34 91 72169-51 · **MSC France · Paris** · Tel. +33 1 45128230 · **Strasbourg** · Tel. +33 3 88 651843 · **Lyon** · Tel. +33 4 72 756020 · **MSC Italia Srl** · Tel. +39 039 63089-1 · **MSC Nederland BV** · Tel. +31 78 6920-150 · **MSC Belgium Office** · Tel. +32 2 452 6451 · **MSC (UK) LTD. · Brighton** · Tel. +44 1273 622446, **Weybridge** · Tel. +44 1932 268990 · **Milton Keynes** · Tel. +44 1908 263999 · **MSC (Scotland) LTD.** · Tel. +44 1506 460555 · **MSC Representative (DK) MK Nordic ApS** · Tel. +45 24 252745 · **MSC-Vertriebs-CZ s.r.o. · Blansko** · Tel. +420 516 411494-15, **Prague** · Tel. +420 251 261 130 · **MSC-Vertriebs-SK s.r.o. · Zilina** · Tel. +421 41 5001243 · **MSC Budapest Kft.** · Tel. +36 1250 90-40 · **MSC Polska Sp. z o.o.** · Tel. +48 323 3054-50 · **MSC-Mibatron s.r.l. · Bucharest** · Tel. +40 31 1023466 · Tel. +40 21 2302530 · **MSC Vertriebs GmbH · Istanbul** · Tel. +90 216 411 2333

