


DV7561-Q45

Intel® Q45 with Core™ 2 Quad/ Core™ 2 Duo ATX Motherboard

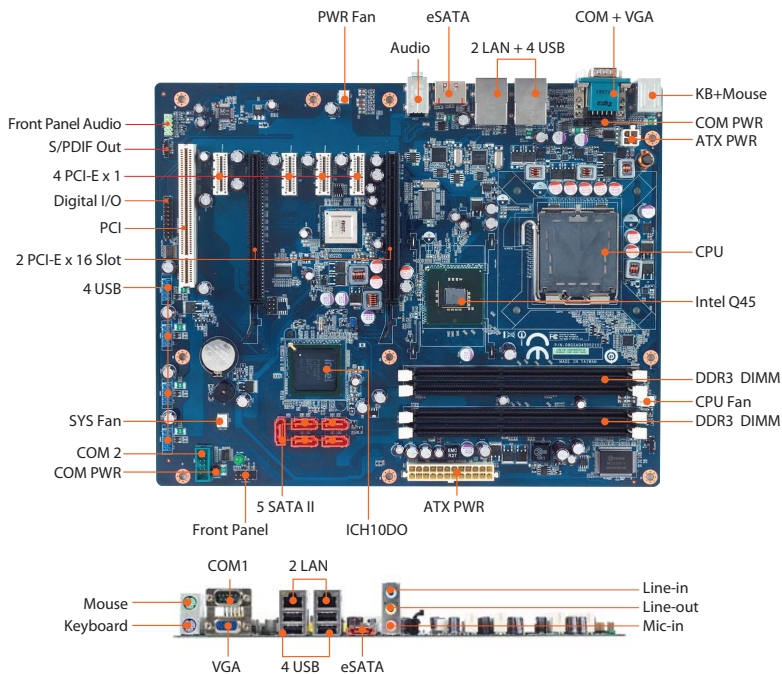

Features

- Socket 775 supports Intel® Q45 Core™ 2 Quad 45nm CPU
- Intel® Q45 + ICH10DO Chipset
- Four DIMMs up to 8GB DDR3 1066 SDRAM
- Intel Graphics Media Accelerator X4500
- Realtek ALC888, 5.1 + 2 Channel HD Streaming Audio
- Dual Realtek RTL8111C Gigabit LAN
- 2 PCI-E x 16, 4 PCI-E x 1, 1 PCI
- Supports RAID 0, 1, 5, 10 function

Specifications

System

CPU	Intel® LGA775 socket supports Core™ 2 Quad/ Core™ 2 Duo/ Pentium®/ Celeron® with 45nm process technology
FSB	1333/ 1066/ 800MHz
BIOS	AMI 32Mb SPI BIOS
System Chipset	Intel® Q45 + ICH10DO Chipset
I/O Chip	Winbond W83627DHG-A
System Memory	Four 240-pin DIMM sockets support up to 8GB Dual Channel DDR3 1066/ 800 SDRAM
Watchdog Timer	Reset : 1 to 255 sec/min per step
H/W Status Monitor	Monitoring temperature, voltage and cooling fan status. Auto throttling control when CPU overheats
Expansion	2 PCI-E x 16 (2 nd Slot : IDT 24 Lane Switch, x 8 bandwidth), 4 PCI-E x 1, 1 PCI
TPM	Intel® Integrated TPM 1.2
Power State	S1, S3, S4, S5
Wake up on LAN or Ring	LAN (PXE)
SmartFan Control	Yes

I/O

MIO	5 SATA II, 1 eSATA, 2 COM RS-232, 1 PS/2 Keyboard, 1 PS/2 Mouse
USB	12 USB 2.0
GPIO	16-bit General Purpose I/O for 8-bit DI and 8-bit DO

Display

Chipset	Intel® Q45 integrated Graphics Media Accelerator X4500
Display Memory	Intel DVMT 4.0 supports up to 384MB video memory
Max. 3D Resolution	2048 x 1536 (@75Hz)
VGA	On board


Audio

Audio Codec	Realtek ALC888, 5.1 + 2 CH HD Audio
Audio Interface	Line-in, Line-out, Mic-in, S/PDIF Out

Ethernet

LAN 1	Realtek RTL8111C Gigabit LAN
LAN 2	Realtek RTL8111C Gigabit LAN

Block Diagram

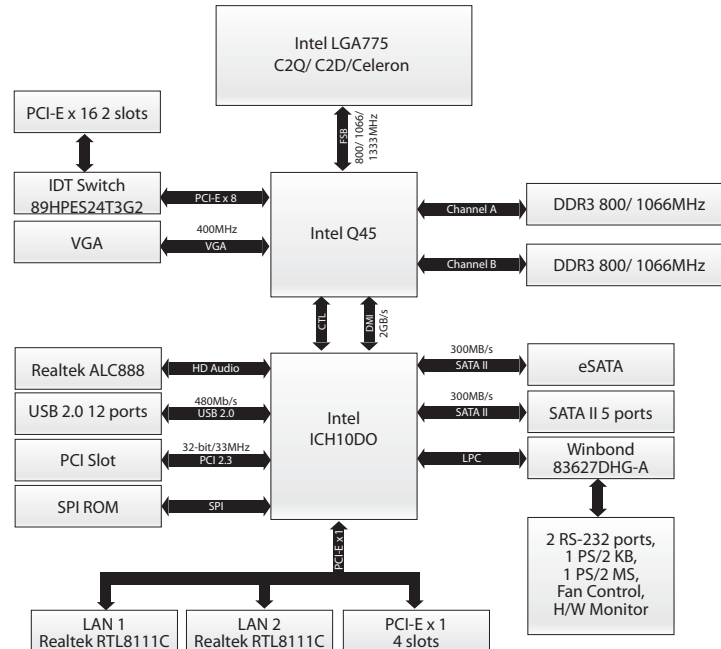

Back Panel I/O Port

1 VGA Port
 4 USB Ports
 1 COM RS-232 Port
 2 LAN RJ45 Ports
 2 PS/2 KB+MS
 1 eSATA Port
 Audio I/O (3 jacks)

Internal I/O Connector

5 SATA Connectors
 4 USB Connectors support 8 USB Ports (with 5V dual)
 1 COM Header
 4 COM RS-232 Headers
 1 Power Fan Connector
 1 Front Panel Header
 1 Chassis Intrusion Header

Mechanical & Environmental

Power Requirement	+12V 3.89A	+5V 3.28A	+3.3V 5.22A	5VSB 0.69A
--------------------------	---------------	--------------	----------------	---------------

Power Type ATX

Power Connector 1 24-pin ATX Power Connector
 1 4-pin ATX 12V Power Connector

Operating Temperature 0 to 60°C (32 to 140°F)

Operating Humidity 0% to 90% relative humidity, non-condensing

Size (L x W) 12" x 9.6" (304.8 mm x 243.84 mm)

Weight 1.32 lbs (0.6 Kg)